


Genie GS3232 Specifications

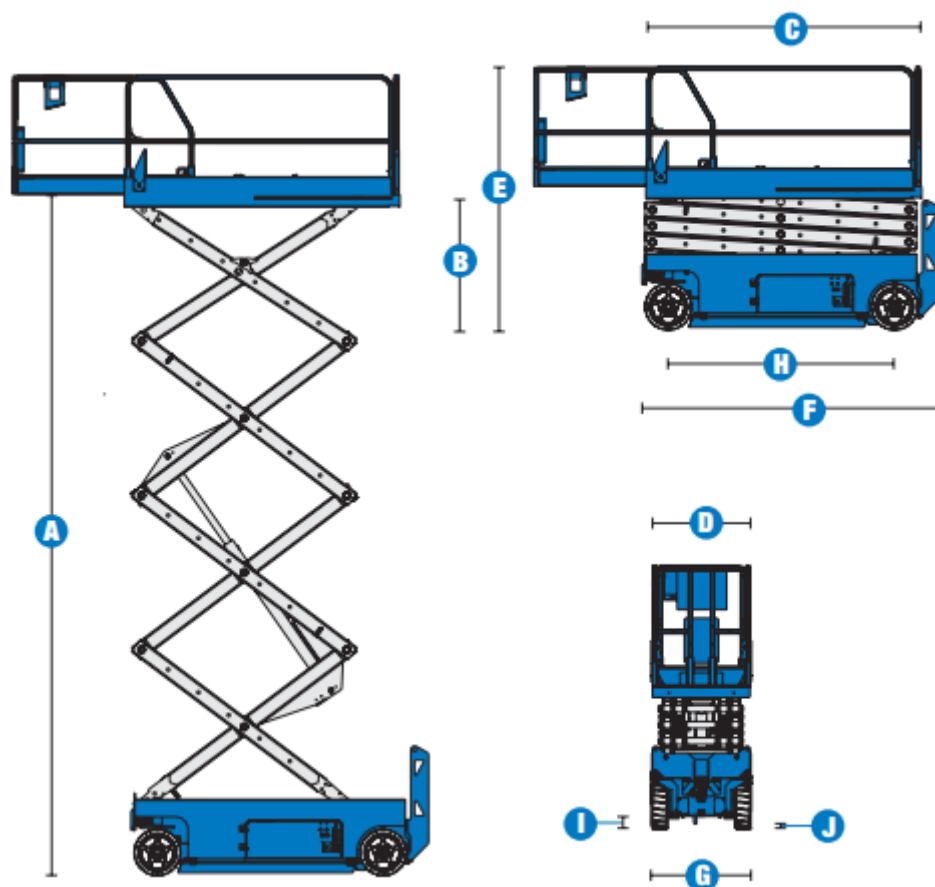

MEASUREMENTS

METRIC

IMP

Working height maximum	11.75 m	38 ft
A - Platform height maximum	9.75 m	32 ft
B - Platform height stowed	1.29 m	4 ft 2.75 in
C - Platform length - outside	2.26 m	7 ft 5 in
Platform length - extended	3.18 m	10 ft 5 in
Slide out platform extension deck	91 cm	3 ft
D - Platform width - outside	81 cm	2 ft 8 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in
E - Height stowed	2.43 m	8 ft
F - Length - stowed	2.43 m	8 ft
Length - extended	3.33 m	10 ft 11 in
G - Width	81 cm	2 ft 8 in
H - Wheelbase	1.85 m	6 ft 1 in
I - Ground clearance - centre	90 cm	3.5 in
J - With pothole guards deployed	20 cm	0.75 in

PRODUCTIVITY

Maximum platform occupancy	2	
Lift capacity	227 kg	500 lbs
Extension deck capacity	113 kg	250 lbs
Drive height	6.71 m	22 ft
Drive speed – stowed	2.2 mph	3.5 km/h
Drive speed – raised	0.5 mph	0.8 km/h
Gradability – stowed***	25%	
Maximum outrigger levelling – front to back	3°	
Maximum outrigger levelling – side to side	5°	
Turning radius – inside	Zero	
Turning radius – outside	2.13 m	7 ft
Raise / lower speed	57 / 40 sec	
Controls	Proportional	
Drive	Dual front wheel	
Multiple disc brakes	Dual rear wheel	
Tires – solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in
Weight	2,352 kg	5,185 lbs

FEATURES

- 2.26m x 81cm Steel platform
- 91cm Extension deck
- Folding rails with half-height swing gate
- Automatic levelling outriggers
- Dual front wheel drive
- Universal 20-amp smart charger
- Proportional lift & drive
- Onboard diagnostic system
- AC power to platform
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brake release
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn