


Genie GS5390RT Specifications

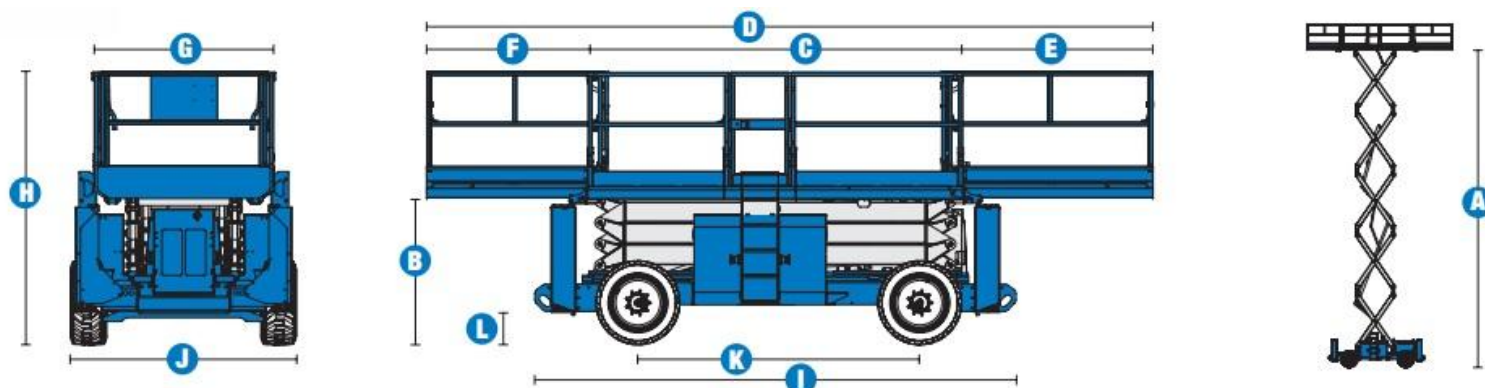

MEASUREMENTS

METRIC

IMP

Working height maximum	18.15 m	59 ft
A - Platform height maximum	16.15 m	53 ft
B - Platform height stowed	2.02 m	6 ft 7.5 in
C - Platform length	3.98 m	13 ft .5 in
Platform length - extended - single deck	5.34 m	17 ft 6.25 in
D - Platform length - dual deck	6.57 m	21 ft 6.5 in
E - Slide out platform extension deck - front	1.52 m	5 ft
F - Slide out platform extension deck - rear	1.22 m	4 ft
G - Platform width - outside	1.83 m	6 ft
H - Height stowed	3.15 m	10 ft 4 in
Height stowed - rails lowered	2.47 m	8 ft 1.25 in
I - Length - stowed with outriggers	4.88 m	16 ft
J - Width	2.29 m	7 ft 6 in
K - Wheelbase	2.84 m	9 ft 4 in
J - Ground clearance - centre	36 cm	1 ft 2 in

PRODUCTIVITY

Lift capacity	680 kg	1,500 lbs
Lift capacity – extension deck	227 kg	500 lbs
Drive height	9.14 m	30 ft
Drive speed – stowed	8.0 km/h	5.0 mph
Drive speed – raised	1.1 km/h	0.7 mph
Gradeability – stowed *	50%	
Max outrigger levelling – front to back	7%	
Max outrigger levelling – side to side	12%	
Turning radius – inside	2.16 m	7 ft 1 in
Turning radius – outside	5.33 m	17 ft 6 in
Raise / lower speed	45 / 39 sec	
Controls	Proportional	
Drive	Four wheel	
Tyres – rough terrain	30 x 84 cm	12 x 33 in
Weight	7,574 kg	16,698 lbs

* Gradeability applies to driving on slopes. See Operators Manual for details regarding slope ratings.

PRODUCTIVITY

- 3.98 x 1.83 m (12 ft 11.25 in x 6 ft) steel platform
- 1.52 m (5 ft 1 in) platform extension deck
- Diamond plate deck
- Proportional lift and drive
- On board diagnostic system
- AC power to platform
- Two self-closing gates
- 4x4
- Automatic levelling hydraulic outriggers
- Oscillating axle
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter